


ACS-G200

OBD2 Smart Hardwire Kit Pro




QuickGuide

English

www.mygekogear.com

Hardware Installation

- 1 Locate the OBD2 port of your vehicle (It is typically located beneath within the footwell under the steering wheel).
- 2 Find the best placement for your device (dash cam, infotainment system etc.), and route the excess cable along the trim of your vehicle.
- 3 Align the OBD2 connector with the OBD2 port of your vehicle and plug it in (please pay attention to the direction of the port).

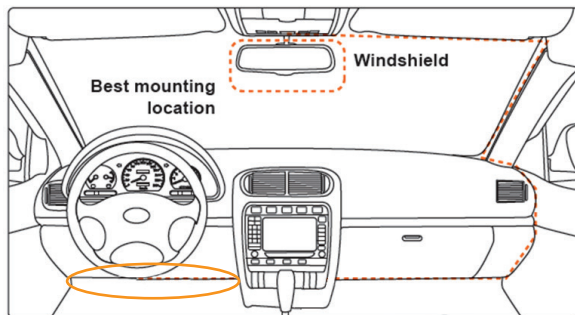

⚠ Caution: We are not responsible for any damage caused to, or caused by, the air bag due to incorrectly placing the device within the range of the safety bag area.

LIMITED WARRANTY

GekoGear provides a one year limited warranty for all of its products against defects in materials and workmanship. During this period, GekoGear will repair or replace any product which proves to be defective. However, GekoGear will not warrant any product which has been subject to improper handling, abuse, negligence, improper installation or unauthorized repair. The warranty will not cover products installed with components not approved by GekoGear and products where the sealed assembly trace has been broken.

If you discover a defect, GekoGear will, at its option, repair or replace the product free of charge, provided you return it during the warranty period with freight charges pre-paid to GekoGear. Before returning any product, you must obtain a Return Merchandise Authorization number (RMA). This RMA # must be clearly marked on the outside of the package you are returning for warranty service. Be certain to also include your name, shipping address (no PO Boxes), telephone number, and a copy of the invoice showing proof of purchase in the package.



Disclaimer: Please note that we strongly recommend professional installation of the hardwiring cable. You are free to attempt the installation yourself, however GekoGear and our affiliates will not be held liable for any product and vehicle damage, or personal injuries sustained by you or others during this installation.

SUPPORT

FAQ's: <https://www.gekogear.com/faq>
 Email Support: support@gekogear.com
 Telephone Support:
 Toll Free: (800) 795-6788
 9:00AM to 5:00PM PST Monday - Friday

Overview

Before use, make sure the following items are included in the package. If anything is missing, contact the retailer where you purchased the OBD2 Smart Hardwire Kit Pro.

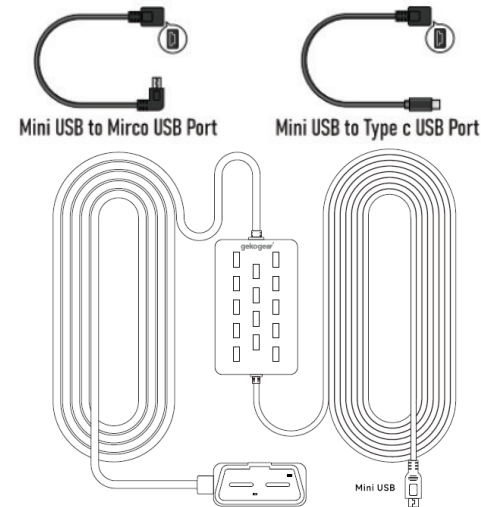

Note: The connector can only go in one way, please align the connector properly

Specifications

Connector: Mini-USB , Micro-USB, & USB-C
 Input Voltage: 12V-24V
 Output Voltage: 5-5.25V
 Output Current: 3.8-4.2A
 Output Maximum Ripple: ≤150mVP-P
 Working Low Temperature: -20°C-0°C
 Working High Temperature: 0-60°C
 Storage Temperature: -20°C-80°C
 Relative Humidity: 90%±%PH
 Cable Length: 9.7ft
 Unit Weight: 0.22 lbs
 Unit Dimensions: 2.8" x 1.6" x 0.7"

